


# SUTTNER

A M E R I C A C O M P A N Y

***PRESSURE WASHER COMPONENTS & ACCESSORIES***

phone 800.831.0660 • fax 800.821.0660 • email [sales@suttner.com](mailto:sales@suttner.com) • web [www.suttner.com](http://www.suttner.com)

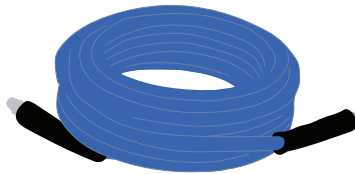

Carpet  
Cleaning  
Catalog  
2023-2024



## 1/4" SINGLE WIRE 3000 PSI BLUE CARPET SOLUTION HOSES

ORDER #	FITTINGS	LENGTH	WEIGHT	BOX QTY
B3V00201	1/4" MPT x M swivel	1 ft	0.15 lb	50
B3V00203	1/4" MPT x M swivel	3 ft	0.46 lb	50
B3V00210	1/4" MPT x M swivel	100 ft	11 lb	2
B3V00300	1/4" MPT x M swivel	200 ft	22 lb	1

PRESSURE	TEMP.	I.D.	O.D.
3000 PSI	-15° F to 250° F	1/4"	.44"

- Blue non-marking abrasion resistant smooth synthetic rubber cover
- Black bend guards on each end
- Reinforced with one layer of high tensile steel wire
- Heat resistant synthetic rubber inner tube
- Designed as a solution hose for carpet cleaning equipment and high pressure cleaning applications



## 3/8" SINGLE WIRE 4000 PSI SMOOTH HOSES

ORDER #	FITTINGS	LENGTH	WEIGHT	BOX QTY
B3V00302	3/8" MPT x M swivel	2 ft	0.48 lb	50
B3V00326	3/8" MPT x M swivel	25 ft	6 lb	6
B3V00335	3/8" MPT x M swivel	50 ft	12.5 lb	4
B3V00425	3/8" MPT x M swivel	75 ft	18 lb	3
B3V00547	3/8" MPT x M swivel	100 ft	25 lb	3
B3R00420	3/8" MPT x M swivel	200 ft	50 lb	1
B3R00430	3/8" MPT x M swivel	300 ft	75 lb	1

TEMP.	PRESSURE	I.D.	O.D.
-15° F to 250° F	4000 PSI	3/8"	.693"

- Blue minimal marking abrasion resistant smooth synthetic rubber cover
- Black bend guards on each end
- Reinforced with one layer of high tensile steel wire
- Heat resistant synthetic rubber inner tube
- Designed as a solution hose for carpet cleaning equipment and high pressure cleaning applications

## SUTTNER SUPERBALLS



ORDER #	DESCRIPTION	COLOR	BOX QTY	BOX WEIGHT
200000505	For 3/8" 4000 PSI hose	Orange	36	1.2 lb
200000515	For 3/8" 6000 PSI hose	Red	36	1.2 lb
200000516	For 1/4" 3000 PSI hose	Blue	36	1.2 lb

- Greatly reduces hose cover wear caused by abrasion
- Helps keep hose clean and water from damming around it
- Easy handling and dragging of hose
- Recommended spacing is 16 inches
- Easy Installation



[https://youtu.be/si6\\_qAYcUnE](https://youtu.be/si6_qAYcUnE)



## **ST-810 P.O.M. SPRAY GUN** (chemical resistant)

Perfect chemical application gun with a stainless steel spring, needle, ball and a poly seat for the best chemical resistance

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	OUTLET	WEIGHT	BOX QTY
200810511	2000 PSI	320° F	8 GPM	3/8" FPT	1/4" FPT	.82 lb	50
200810525	2000 PSI	320° F	8 GPM	1/4" FPT	1/4" FPT	.82 lb	50

Repair Kit: #200810492

- Front inlet design keeps dirty hose just far enough away, keeping the operator clean
- Most economical light to medium duty spray gun ever
- Forged brass housing for maximum strength
- **Chemical resistant**



## **ST-601 SPRAY GUN** (inline applications)

Ideal for cleaning vertical and overhead surfaces. Perfect for washing tractors, trailers, siding, windows, eaves, etc. Heavy duty, impact resistant trigger guard has made the ST-601 an industry standard for manufacturers of telescoping wands.

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	OUTLET	WEIGHT	BOX QTY
200601610	4000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.20 lb	50

Repair Kit: #202000044

- Horizontal flow-through design
- Forged brass housing for maximum strength
- Unitized valve for easy repair
- Stainless steel spring, needle, ball and seat



## **ST-003 LANCES** (nickel chrome plated steel)

Suitable when using corrosive chemicals. Our most popular lances for cold or hot water applications.

ORDER #	PRESSURE	LENGTH	WEIGHT	BOX QTY
070000026	6000 PSI	18 in	.46 lb	100
070000040	6000 PSI	24 in	.64 lb	50

TEMP.	INLET	OUTLET
300° F	1/4" MPT	1/4" MPT

- Nickel chrome plated steel to prevent rusting
- Threads are rolled on providing consistent sealing and four times the strength than cut threads



## **ST-7 FLOW SWITCH** (with micro switch)

Mounts in **any position** and spring assisted brass magnet configuration

ORDER #	PRESSURE	TEMP.	FLOW RATE	SWITCH POINT
200007500	75 - 5000 PSI	176° F	12 GPM	1.2 GPM
200007510	75 - 5000 PSI	176° F	12 GPM	0.3 GPM

INLET	OUTLET	WEIGHT	BOX QTY
3/8" FPT	3/8" FPT	.80 lb	50

Replacement micro switch: #200007498

#200007500 replacement float: #200007497

#200007510 replacement float: #200007496

- With micro-switch instead of reed switch
- Easy to install
- Resistant against shock and vibration
- IP 65 rated-water and dust proof
- Can be wired normally opened or closed





## ST-230 SAFETY RELIEF VALVE

(stainless steel ball and valve seat)

Ideal in-line regulator for multi-gun pumping units on self-serve car wash systems. Perfect for pressure washer/steam combination applications and carpet cleaning industry.

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	OUTLET
200230520	500-2200 PSI	200° F	8 GPM	1/4" FPT	1/4" FPT
O-RING		WEIGHT			
EPDM		.84 lb			

Repair Kit: #200230496

- Adjustable pressure
- Forged brass housing
- Special seals for maximum heat and chemical resistance
- Can be rebuilt without removing from the installation
- Valve member rides on elastomeric cushion, eliminating metal to metal contact, a common cause of regulator failure

#562391625



## EASYWASH SWIVELS

Swivels applicable to high pressure spray guns and hose connections, ceiling booms as well as self-serve car wash

ORDER #	PRESSURE	TEMP.	SIZE	BOX QTY.	WEIGHT
562391620	4000 PSI	300° F	1/4" FPT x 1/4" FPT	25	.40 lb
562391625	4000 PSI	300° F	3/8" FPT x 3/8" FPT	25	.40 lb

- Maintenance free
- Nickel plated, stainless steel internal



Spring for  
#200261504



## ST-261C UNLOADER VALVE (pressure compensating)

Lower PSI setting. **Ideal for carpet cleaners.**

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET
200261504	200 - 1000 PSI	176° F	8 GPM	3/8" FPT
OUTLET		BYPASS	WEIGHT	BOX QTY
3/8" FPT		1/4" FPT	1.34 lb	25

Repair Kits:

Valve #200261526

Bypass #200261528

**EATON**



brass



303  
stainless steel

## TWO-WAY CHECK VALVE SOCKETS (quick change)

ORDER #	EATON #	PRESSURE	DESCRIPTION	MATERIAL	WEIGHT
20TWBR710	B2H16-192	2700 PSI	1/4" FPT Socket	Brass	.30 lb
20TWBR730	B3H-21	2200 PSI	3/8" FPT Socket	Brass	.44 lb
20TWSS710	LL2H16-192	3700 PSI	1/4" FPT Socket	303 Stainless	.28 lb
20TWSS730	LL3-H21	3700 PSI	3/8" FPT Socket	303 Stainless	.42 lb

- O-ring: EPDM

**EATON**



brass



303  
stainless steel

## TWO-WAY CHECK VALVE PLUGS (quick change)

ORDER #	EATON #	PRESSURE	DESCRIPTION	MATERIAL	WEIGHT
10TWBR150	B2K16-192	2700 PSI	1/4" FPT Plug	Brass	.30 lb
10TWBR170	B3K-21	2200 PSI	3/8" FPT Plug	Brass	.44 lb
10TWSS150	LL2H16-192	3700 PSI	1/4" FPT Plug	303 Stainless	.42 lb
10TWSS170	LL3-K21	3700 PSI	3/8" FPT Plug	303 Stainless	.44 lb