
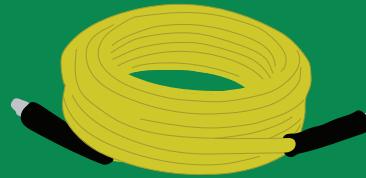


SUTTNER

A M E R I C A C O M P A N Y

PRESSURE WASHER COMPONENTS & ACCESSORIES

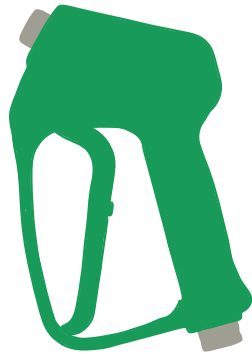

*Color Coded
Cleaning
Products
Catalog
2023-2024*



Table of Contents

SPRAY GUNS.....*Pages 3 & 4*

LANCES & NOOZLES.....*Page 5*

NOZZLE PROTECTORS, Q.C. SOCKETS & PLUGS.....*Page 6*

HOSE HANGER & HOSES.....*Page 7*



ST-1200S WASH DOWN GUN *(stainless steel)*

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	WEIGHT	COLOR	BOX QTY
201200520	350 PSI	190° F	27 GPM	1/2" FPT	1.86 lb	Blue	10
201200521	350 PSI	190° F	27 GPM	1/2" FPT	1.86 lb	Green	10
201200522	350 PSI	190° F	27 GPM	1/2" FPT	1.86 lb	Yellow	10
201200523	350 PSI	190° F	27 GPM	1/2" FPT	1.86 lb	Red	10

- Comes with trigger guard
- Stainless steel housing
- Fixing clamp holds back trigger allowing comfort and steady spray
- Durable spray gun with rubber sheathing protects against cold, heat and impact
- High volume
- Adjusting screw retains desired spray pattern



ST-2305 SPRAY GUNS

Comfort technology designed "Easy-Pull Trigger" and comfortable grip provide ease when working long hours. If you have extreme abuse applications, the ST-2305 is up for the challenge with it's handle constructed of impact resistant plastic.

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	OUTLET	WEIGHT	COLOR
202305660	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.22 lb.	Blue
202305661	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.22 lb.	Yellow
202305662	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.22 lb.	Red
202305663	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.22 lb.	Green

Repair Kit: #202300490

- Easy-Pull is designed for operators and applications with high-volume of trigger cycling
- Easy-Pull, German Engineered Technology reduces trigger pulling force by 60% compared to standard spray guns
- Proper spray angle for optimal positioning of pressure points
- Easiest opening and holding trigger, requires nearly half the effort of the other rear-entry guns
- Forged brass housing for maximum strength
- Private Label Availability



Spray Guns

FOOD
GRADE



ST-2700 SPRAY GUN

Stainless steel components create a durable long lasting trigger gun, especially suitable when using alkaline. Comfort technology designed trigger system actually helps the operator keep the trigger open. Fatigue is reduced, allowing longer work periods.

ORDER #	PRESSURE	TEMP.	FLOW RATE	INLET	OUTLET	WEIGHT	COLOR
202700621	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.24 lb.	Yellow
202700622	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.24 lb.	Blue
202700623	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.24 lb.	Green
202700624	5000 PSI	300° F	12 GPM	3/8" FPT	1/4" FPT	1.24 lb.	Red

Repair Kit: #202700490

- Relax-Action™, is designed for operators and applications with longer periods of cleaning time
- Stainless steel components
- 304 Stainless steel housing
- Relax-Action™, German Engineered Technology reduces trigger pulling force by 40% and holding force up to 90% compared to standard spray guns
- Easiest opening and holding trigger in its class
- Private Label Availability

Legend:



Easy Pull Trigger: German Engineered Technology reduces the trigger pulling force by 60% compared to standard spray guns. It is designed for operators and applications with high-volume of trigger cycling.



Private Label Availability: Promote your company name or logo with customizing select spray guns' label.



Relax Action: German Engineered Technology reduces trigger pulling force by 40% and holding force up to 90% compared to standard spray guns. It is designed for operators and applications with longer periods of cleaning time.

ST-29 MOLDED GRIP LANCES *(stainless steel)*

ORDER #	PRESSURE	TEMP.	LENGTH	INLET	OUTLET	WEIGHT	COLOR
200029315	6000 PSI	300° F	36 in.	1/4" MPT	1/4" MPT	1.10 lb.	Blue
200029316	6000 PSI	300° F	36 in.	1/4" MPT	1/4" MPT	1.10 lb.	Yellow
200029317	6000 PSI	300° F	36 in.	1/4" MPT	1/4" MPT	1.10 lb.	Green
200029318	6000 PSI	300° F	36 in.	1/4" MPT	1/4" MPT	1.10 lb.	Red

- Comfortable grip
- Ergonomic shape
- Heat-proof insulation
- **Chemical resistant**



1/4" MPT NOZZLES *(hardened stainless steel)*

Ideal for one nozzle applications and quick exchange is not needed

ORIFICE SIZE	0°	5°	15°	25°	40°	50°	65°
1.0	—	—	—	820202501	820204010	—	—
1.5	—	—	—	820202515	—	—	—
2.0	820200020	—	820201520	820202520	820204020	—	820206502
3.0	820200003	—	820201530	820202530	820204030	—	820306530
3.5	820200035	—	820201535	820202535	820204035	—	—
4.0	820300004	820300504	820301540	820302540	820304040	—	820306540
4.5	820400045	—	820401545	820402545	820404045	—	820406545
5.0	820500005	—	820501550	820502550	820504050	—	820506550
5.5	820600055	—	820601555	820602555	820604055	—	820606555
6.0	820700006	—	820701560	820702560	820704060	820705060	820706560
6.5	820700065	—	820701565	820702565	820704065	—	—
7.0	820800007	—	820801570	820802570	820804070	—	—
7.5	—	—	820801575	—	—	—	—
8.0	820900008	—	820901580	820902580	820904080	—	820906508
9.0	—	—	820901509	—	820904090	820905090	820906509
10.0	821000010	—	821001510	821002510	821004010	—	821006510
11.0	—	—	821001511	—	—	—	—
12.0	821000012	821500512	821001512	821002512	821004012	—	—
15.0	821000015	821500515	821001515	821002515	821504015	—	821006515
20.0	821000020	821500520	821501520	821002520	821504020	821005020	821006520
25.0	821500025	—	821501525	821502525	821004025	—	—
30.0	821000030	821500530	821601530	821002530	821604030	—	821006530
35.0	821000035	—	821001535	821002535	821604035	—	—
40.0	821000040	—	821001540	821002540	821004040	—	821006530
50.0	821000050	—	—	—	821004050	—	—
60.0	821000060	821500560	—	821002560	—	—	—



- Spray angles range from high impact solid stream 0° to 65° flat spray
- Produce an uniform distribution of small to medium sized drops

Nozzle Protectors, Q.C. Sockets & Plugs

FOOD
GRADE



Example shown here, product sold separately

NOZZLE PROTECTORS ST-11

ORDER #	TEMP.	WEIGHT	COLOR
020001123	300° F	0.2 lb	Yellow
020001149	300° F	0.2 lb	Blue
020001122	300° F	0.2 lb	Green
020001121	300° F	0.2 lb	Red

- The nozzle protector ST-11 suitable for nozzles 1/4" M

Q.C. STAINLESS STEEL SOCKETS (303 stainless steel)

Couplers are used anywhere high pressure connections are frequently connected and disconnected. Ideal for quick change of quick nozzles and spray guns.

EATON



ORDER #	EATON #	PRESSURE	DESCRIPTION	O-RING	BAG QTY	WEIGHT
20SS45700	LL2-S15	7500 PSI	1/4" MPT Socket	Buna	200	.22 lb
20SS45710	LL2-S16	7500 PSI	1/4" FPT Socket	Buna	200	.16 lb
20SS45720	LL3-S20	6300 PSI	3/8" MPT Socket	Buna	125	.22 lb
20SS45730	LL3-S21	6300 PSI	3/8" FPT Socket	Buna	125	.24 lb
20SS45745	LL4-S26	3600 PSI	1/2" MPT Socket	Buna	75	.32 lb
20SS45750	LL4-S25	3600 PSI	1/2" FPT Socket	Buna	75	.35 lb

- Knurling on socket sleeve helps to grip ball lock
- Eaton quick couplers are the original, invented in 1915 and are still the number one name for quality couplers
- Interchanges easily with Suttner products and other major brands

Comparable rated components must be used together

Q.C. PLUGS (303 stainless steel)

EATON




ORDER #	EATON #	PRESSURE	DESCRIPTION	BAG QTY	WEIGHT
1000SS140	LL2-T15	7500 PSI	1/4" MPT Plug	25	.06 lb
1000SS150	LL2-T16	7500 PSI	1/4" FPT Plug	25	.06 lb
1000SS160	LL3-T20	6300 PSI	3/8" MPT Plug	25	.08 lb
1000SS170	LL4-T20	6300 PSI	3/8" FPT Plug	25	.12 lb
1000SS180	LL4-T25	3600 PSI	1/2" MPT Plug	25	.16 lb
1000SS190	LL4-T26	3600 PSI	1/2" FPT Plug	25	.18 lb

Comparable rated components must be used together

HOSE HANGER *(stainless steel)*

ORDER #	MATERIAL	DIMENSION	WEIGHT
11006	Polished Stainless Steel	13.75" x 6" x 7.75"	2 lb

- Polished stainless steel
- Food grade
- Holds 175 ft of 3/8" hose
- Holds 120 ft of 1/2" hose
- Holds 90 ft of 3/4" hose



3/8" SINGLE WIRE 4000 PSI HOSES

ORDER #	COLOR	FITTINGS	LENGTH	WEIGHT	BOX QTY
B3V00340	Black	3/8" MPT x M Swivel	25 ft	4.57 lb	6
B3V00341	Gray	3/8" MPT x M Swivel	25 ft	4.57 lb	6
B3V00350	Black	3/8" MPT x M Swivel	50 ft	9.15 lb	5
B3V00351	Black	3/8" QC Socket / Plug	50 ft	9.15 lb	5
B3V00352	Gray	3/8" MPT x M Swivel	50 ft	9.15 lb	5
B3V00353	Gray	3/8" QC Socket / Plug	50 ft	9.15 lb	5
B3V00354	Blue	3/8" MPT x M Swivel	50 ft	9.15 lb	5
B3V00355	Yellow	3/8" MPT x M Swivel	50 ft	9.15 lb	5
B3V00375	Black	3/8" MPT x M Swivel	75 ft	13.75 lb	3
B3V00376	Gray	3/8" MPT x M Swivel	75 ft	13.75 lb	3
B3V00377	Blue	3/8" MPT x M Swivel	75 ft	13.75 lb	3
B3V00378	Yellow	3/8" MPT x M Swivel	75 ft	13.75 lb	3
B3V00380	Black	3/8" MPT x M Swivel	100 ft	18.25 lb	3
B3V00381	Black	3/8" QC Socket / Plug	100 ft	18.25 lb	3
B3V00382	Gray	3/8" MPT x M Swivel	100 ft	18.25 lb	3
B3V00384	Blue	3/8" MPT x M Swivel	100 ft	18.25 lb	3
B3V00700	Yellow	3/8" MPT x M Swivel	100 ft	18.25 lb	3
B3V00390	Black	3/8" MPT x M Swivel	150 ft	27.4 lb	1
B3V00391	Gray	3/8" MPT x M Swivel	150 ft	27.4 lb	1
B3V00395	Black	3/8" MPT x M Swivel	200 ft	36.5 lb	1
B3V00396	Gray	3/8" MPT x M Swivel	200 ft	36.5 lb	1




PRESSURE	TEMP.	I.D.	O.D.
4000 PSI	-15° F to 250° F	3/8"	.693"

- Synthetic rubber abrasion resistant wrapped cover
- Designed for commercial high pressure cleaning applications
- Single wire braided rubber hose
- Black bend guards on each end
- Heat resistant synthetic rubber inner tube

ALSO AVAILABLE:

Hose Reels



SUTTNER

A M E R I C A C O M P A N Y

PRESSURE WASHER COMPONENTS & ACCESSORIES

With almost **60** years of experience, Suttner America Company is one of the worldwide leading manufacturers of high quality products for the cleaning industry.

Address:

14864 West Ridge Ln.
Dubuque, IA 52003

Fax:

(563) 556.3038
(800) 821.0660

Phone:

(563) 556.3212
(800) 831.0660

Email:

sales@suttner.com

Web:

www.suttner.com

GERMAN ENGINEERED TECHNOLOGY